


Technical data sheet and product guideline



RU5GRAY

Grey ruthenium for bath plating 5 g/l ready-to-use

Color coordinates

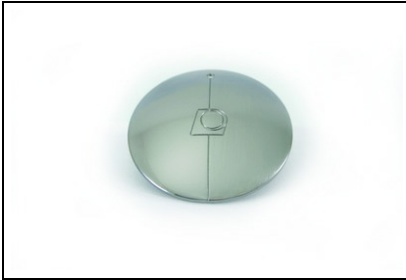

L	72.1
a	0.6
b	2.9
c	2.9

Product form

Metal concentration	5 g/l (Ru)
Form	Liquid
Material color	Black
Storage time	2 years
Format	Ready to use
Chemical type	Acidic
Volume	1 liter

Operating data

	Range	Optimal
Voltage (V)	1.8-2.2	2
Current density (A/dm ²)	0.5-2	1
Working temperature (°C)	50-70	60
Exposure time (sec)	60-360	240
pH	0.8-1.5	1
Cathode efficiency (mg/Amin)	1-5	3
Anode/cathode ratio	1:1-4:1	2:1
Anode type	Platoned titanium	
Agitation	Strong	

Metal concentration

Metal	Range (g/l)	Optimal (g/l)
Ruthenium	3-10	5

Deposit data

Purity (%)	99.9
Hardness (HV 0,01)	400-700
Density (g/cm ³)	10.5
Thickness (um)	0.02-0.20
Appearance	Shiny
Color	Grey

Preparation

RU5GRAY is a ready-to-use galvanic bath at the concentration of 5 g/l. No preparation is required.

Technical data sheet and product guideline

RU5GRAY

Grey ruthenium for bath plating 5 g/l ready-to-use



Equipment

Working vessel: Pyrex glass / PVC / polypropylene.

Power supply: DC current rectifier with low residual AC (<5%).

Heating element.


Anode Type Platinized Titanium [1.5-2.5 µm].

For larger bath volumes:

Magnetic driven filter pumps with 5-15 µm cartridge (before use, boil and wash the cartridges with demineralized water for 3 hours to prevent organic contamination).

Amp/min counter.

Pre treatment Cleansing procedure

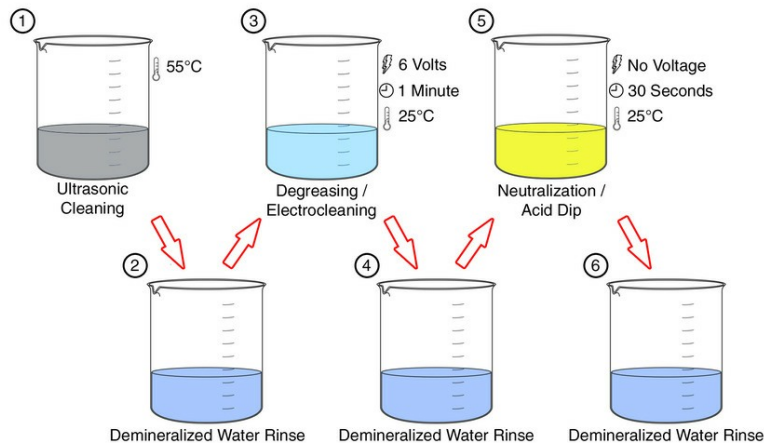

Technical data sheet and product guideline

RU5GRAY

Grey ruthenium for bath plating 5 g/l ready-to-use



Bath maintenance

Metallic additions

For small-size ruthenium baths (up to 3 liters) we advise to use until the ruthenium solution is completely exhausted and dispose without incorporating replenishment. For larger-sized baths add **RU5R** which is a pre calibrated replenisher containing additional ruthenium in concentrate to restore the optimal ruthenium concentration. For perfect galvanic bath performance it is advisable to maintain the ruthenium concentration at a minimum of 20% of the initial concentration; for example, with a bath operating at a concentration of 5 g/l, additions should be made after a maximum consumption of 1 g/l of ruthenium. When introducing additional metal keep in mind that in optimum working conditions a bath working at 5 g/l normally deposits about 3 mg of ruthenium per Ampere/minute.

pH control

pH is a very important parameter especially when working on high thickness layers. The pH value must be frequently controlled and held under optimal values numerically described in the operating data table.

In the case corrections are needed use Ammonium hydroxide to raise the pH, and **RU5S** conductive salts to lower it.

Density control

Solution density is not a critical parameter. In the case of heavy productions, it is advised to control the density periodically by chemical titration. As the density lowers in value, restore to it's optimum working health using **RU5S** conductive salts. Adding 10 g/l of **RU5S** will raise the solution density of about 1° Bé.

Post treatment

The electrolyte should be removed from the surface as quick as possible.

1. Wash off the bath residual in a recovery rinse (still rinse) followed by
2. Wash the article in hot distilled water (80°C).
3. Rinse the parts in circulating or running water.
4. Dry

In the case a problem is observed, replace step #2 with a 50% cold ammonia solution rinse for 5 minutes. This action should be preformed under an exhaust hood.

Water purity

To prevent contamination of the bath both during its preparation and any subsequent replenishing operations, use demineralized water with a conductivity of less than 3 µS/cm (containing no traces of organic compounds, Chlorine, Silicon, or Boron).

Safety information

Being an acidic solution, the electrolyte is corrosive therefore is an irritant to the skin, eyes and mucous membranes. Caution should be exercised when using the product, avoiding contact with the eyes and skin. Use gloves and safety goggles. Keep away from cyanide based chemicals. For further information please refer to the relative MSDS.

Technical data sheet and product guideline

RU5GRAY

Grey ruthenium for bath plating 5 g/l ready-to-use



Disclaimer

All recommendations and suggestions in this bulletin concerning the use of our products are based upon tests and data believed to be reliable. Since the actual use by others is beyond our control, no guarantee expressed or implied, is made by Legor Group, its subsidiaries or distributors, as to the effects of such use or results to be obtained, nor is any information to be construed as a recommendation to infringe any patent.

Packaging

